
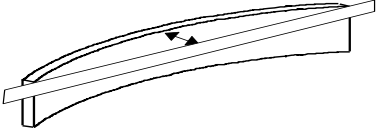
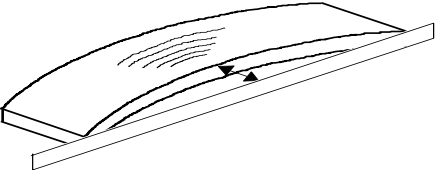
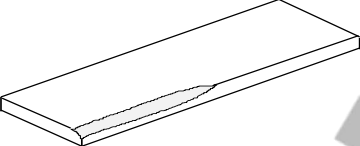
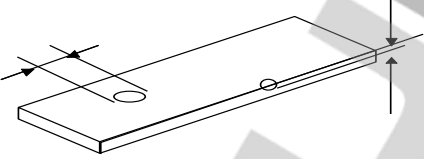




Date: 22.05.2017	C
Main profiles	Interior cladding, exterior cladding, flooring, decking, four-sides planed timber. LOWER QUALITY AS A SIDE PRODUCTION OF THE MAIN QUALITY.
Slash (spike, splay) knots	No restrictions.
Sound knots	No restrictions.
Unsound knots (soft dark-coloured)	No restrictions.
Bark-ringed knots	No restrictions.
Dead knots (firm dark-coloured)	No restrictions.
Loose knots or knotholes	No restrictions.
Max. permitted no. of knots per meter	No restrictions.
Checks	No restrictions.
End shakes	No restrictions.
Ring shakes	No restrictions.
Wane and mechanical damages	Permitted on the hidden and unused side of the profile provided installation of the board is not restricted.
Resin pockets	No restrictions.
Bark pocket, scar	No restrictions.
Compression wood	No restrictions.
Discoloration	Early discoloration (dote) and blue stain permitted. Fungus is not permitted.
Insect damage	No restrictions.
Moisture content	16 ± 2%
Surface quality	Max. permitted length of hit & miss surface on the visible sides is 4x of the board width. Hit & miss surface on the edges of the visible sides permitted in max. 20% of the volume, till 20% of the board width on the worst side.
Tolerance	Length: ± 10 mm unless specified otherwise. Thickness: ± 0.5 mm. Width: ± 0.5 mm.

<p>Twist</p> 	<p>No restrictions.</p>
<p>Bow</p> 	<p>No restrictions.</p>
<p>Edge bow (crook)</p> 	<p>No restrictions.</p>
<p>Wane</p> 	<p>Permitted on the hidden and unused side of the profile provided installation of the board is not restricted.</p>
<p>Knots</p> 	<p>For details on cross-sections see page 1.</p>
<p>Discoloration (rot, fungus, blue stain)</p> 	<p>Early discoloration (dote) and blue stain permitted. Fungus is not permitted.</p>
<p>Checks and end shakes</p> 	<p>No restrictions.</p>